



SSV WORKS, 201 N. Rice Ave Unit A, Oxnard, CA 93030
www.SSVworks.com | Phone: 818-991-1778 | Fax: 866-293-6751

US-OSP65

Universal 90° Overhead
6.5" Speaker Cage Pods

WARRANTY INFORMATION:

All SSV Works enclosures are covered by a limited lifetime warranty against defects in material or workmanship. All SSV Works Electronics are covered by a limited 1 year warranty against defects in material or workmanship. Labor for replacement of defective components is not covered. All SSV Works Speakers are covered by a limited 1 year warranty against defects in material or workmanship. Contact SSV Works for further warranty information.



Please read and understand these instructions completely before installation to avoid possible injury, or damage to the accessory or vehicle.

TOOLS NEEDED FOR INSTALLATION

- 1/8" and 1/4" Drill Bit
- #2 Phillips Screwdriver
- Wire Crimpers
- #3 Phillips Screwdriver
- Wire Strippers
- Scribe or Marker

PARTS LIST

- 1. US-OSP65-U (1 pair)
- 2. M6 x 1.0 Screws x 16
- 3. M6 Washers x 16
- 4. Mounting Brackets x 4


PARTS LIST IMAGES



1. US-OSP65-U (1 pair)



2. M6 x 1.0 Screws x 16



3. M6 Washers x 16



4. Mounting Brackets x 4

INSTALLATION NOTES

The use of a thread locker is recommended on all screws to prevent loosening due to vibration. Sealing all wiring holes with a silicone sealer will prevent moisture from entering the enclosure



A

A. Place the speaker into the enclosure and mark the 4 mounting holes with a scribe or marker. Pre-drill the marked mounting locations using a 1/8" drill bit.



B

B. Drill a 1/4" hole for the speaker wire to exit in the location shown.



C. Connect and install the speaker into the enclosure (be sure to connect the “+” red speaker wire to the “+” terminal on the speaker and the “-“ black speaker wire to the “-“ terminal on the speaker) using the #2 Phillips screwdriver.




D. Place the enclosure into the overhead mounting location and using the #3 screwdriver install the brackets with the screws and washers provided.



E. Route the speaker wires away from moving parts and any sharp metal, then connect to the amplifier.

WIRING INSTRUCTIONS

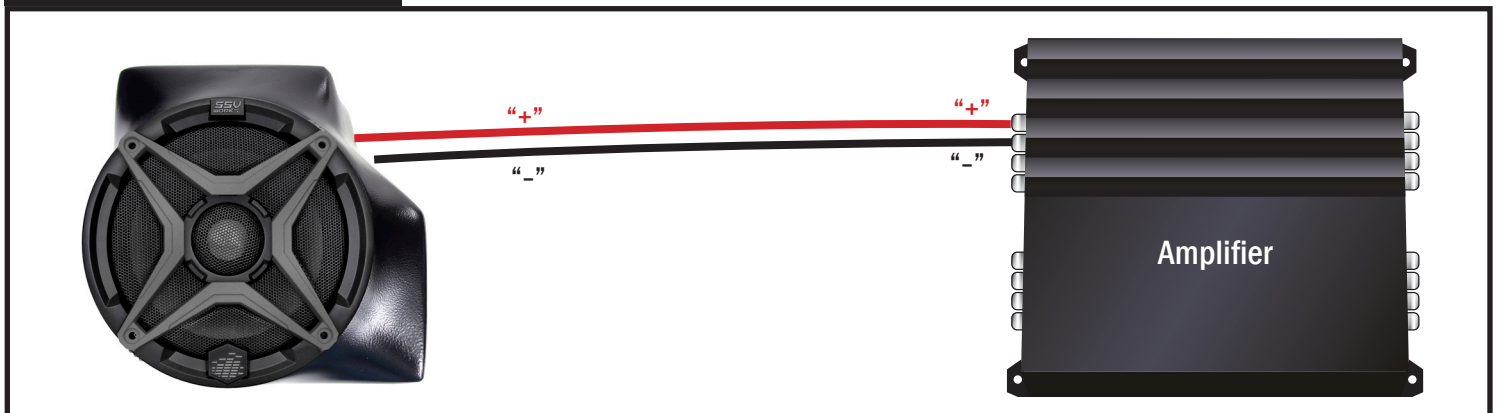

For proper sound, ensure the speaker polarity is correct connect the “+” to the “+” and the “-“to the “-“from the speaker wire to the amplifier. If using with an SSV Works complete system refer to the amplifier wiring instructions for more detailed wiring information.